


## PERSONALIZING OPTIONS


GOOD / BETTER / **BEST**

### CARRIAGE HOUSE DESIGNS

Square Tops

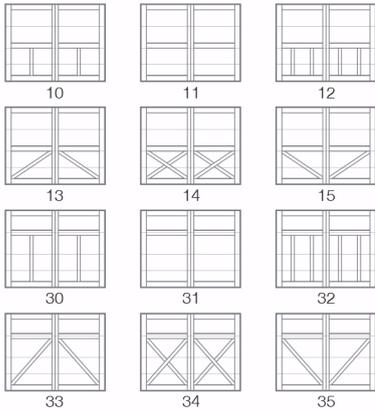

Arched Tops

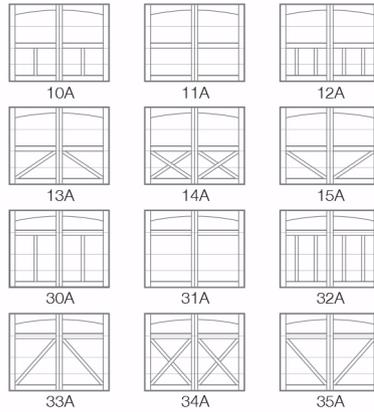

### ACCENTS WOODTONES<sup>1</sup>




### 2-TONE ACCENTS WOODTONES<sup>1</sup>




### WINDOW DESIGNS


Double Row

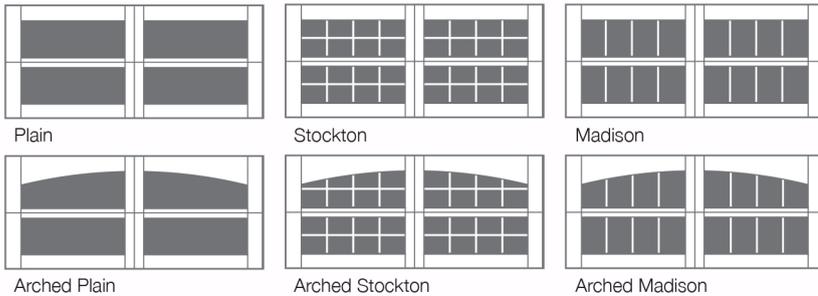

Single Row

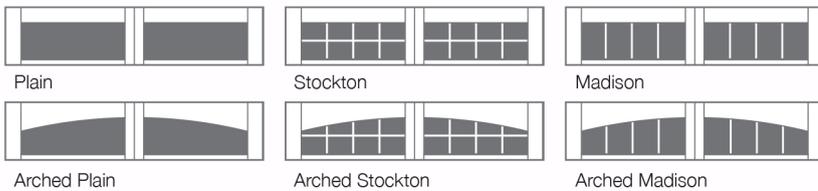

### GLASS

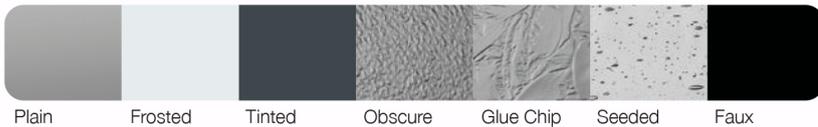


### EXTERIOR HARDWARE



## Specifications

Panel Style	Overlay
Overlay Material	Molded Polyurethane
Section Construction	2-1/2" Thick - 2-Sided Steel
Section Material	27 <sup>2</sup> Ga. Steel
Insulation Type	Polyurethane



Thermal Rating <sup>5</sup>	<b>U-Factor .19 / R-17.54</b>
Window Style <sup>3</sup>	Square or Arched
Glass	Insulated
FBC Wind Load <sup>4</sup>	Non-Impact and Impact Rated
TDI Wind Load <sup>4</sup>	Impact Rated Only
Warranty	Limited Lifetime on Sections 3 Years on Overlays 3 Years on Springs 6 Years on Hardware

<sup>1</sup> Refer to your local C.H.I. Dealer for exact woodtone match. <sup>2</sup> Lower steel gauge [ga.] number indicates stronger steel. <sup>3</sup> Model number indicates design and window style. <sup>4</sup> Ask your local C.H.I. Dealer about our full line of wind load rated doors. <sup>5</sup> Compliance with the DASMA Thermal Performance Program.